


SPECIAL PIPE BEVELING APPLICATION

for fin tube, omega tube and double omega tube



SPECIAL CLAMPING AND BEVELING DEVICES INCREASE YOUR PRODUCTIVITY

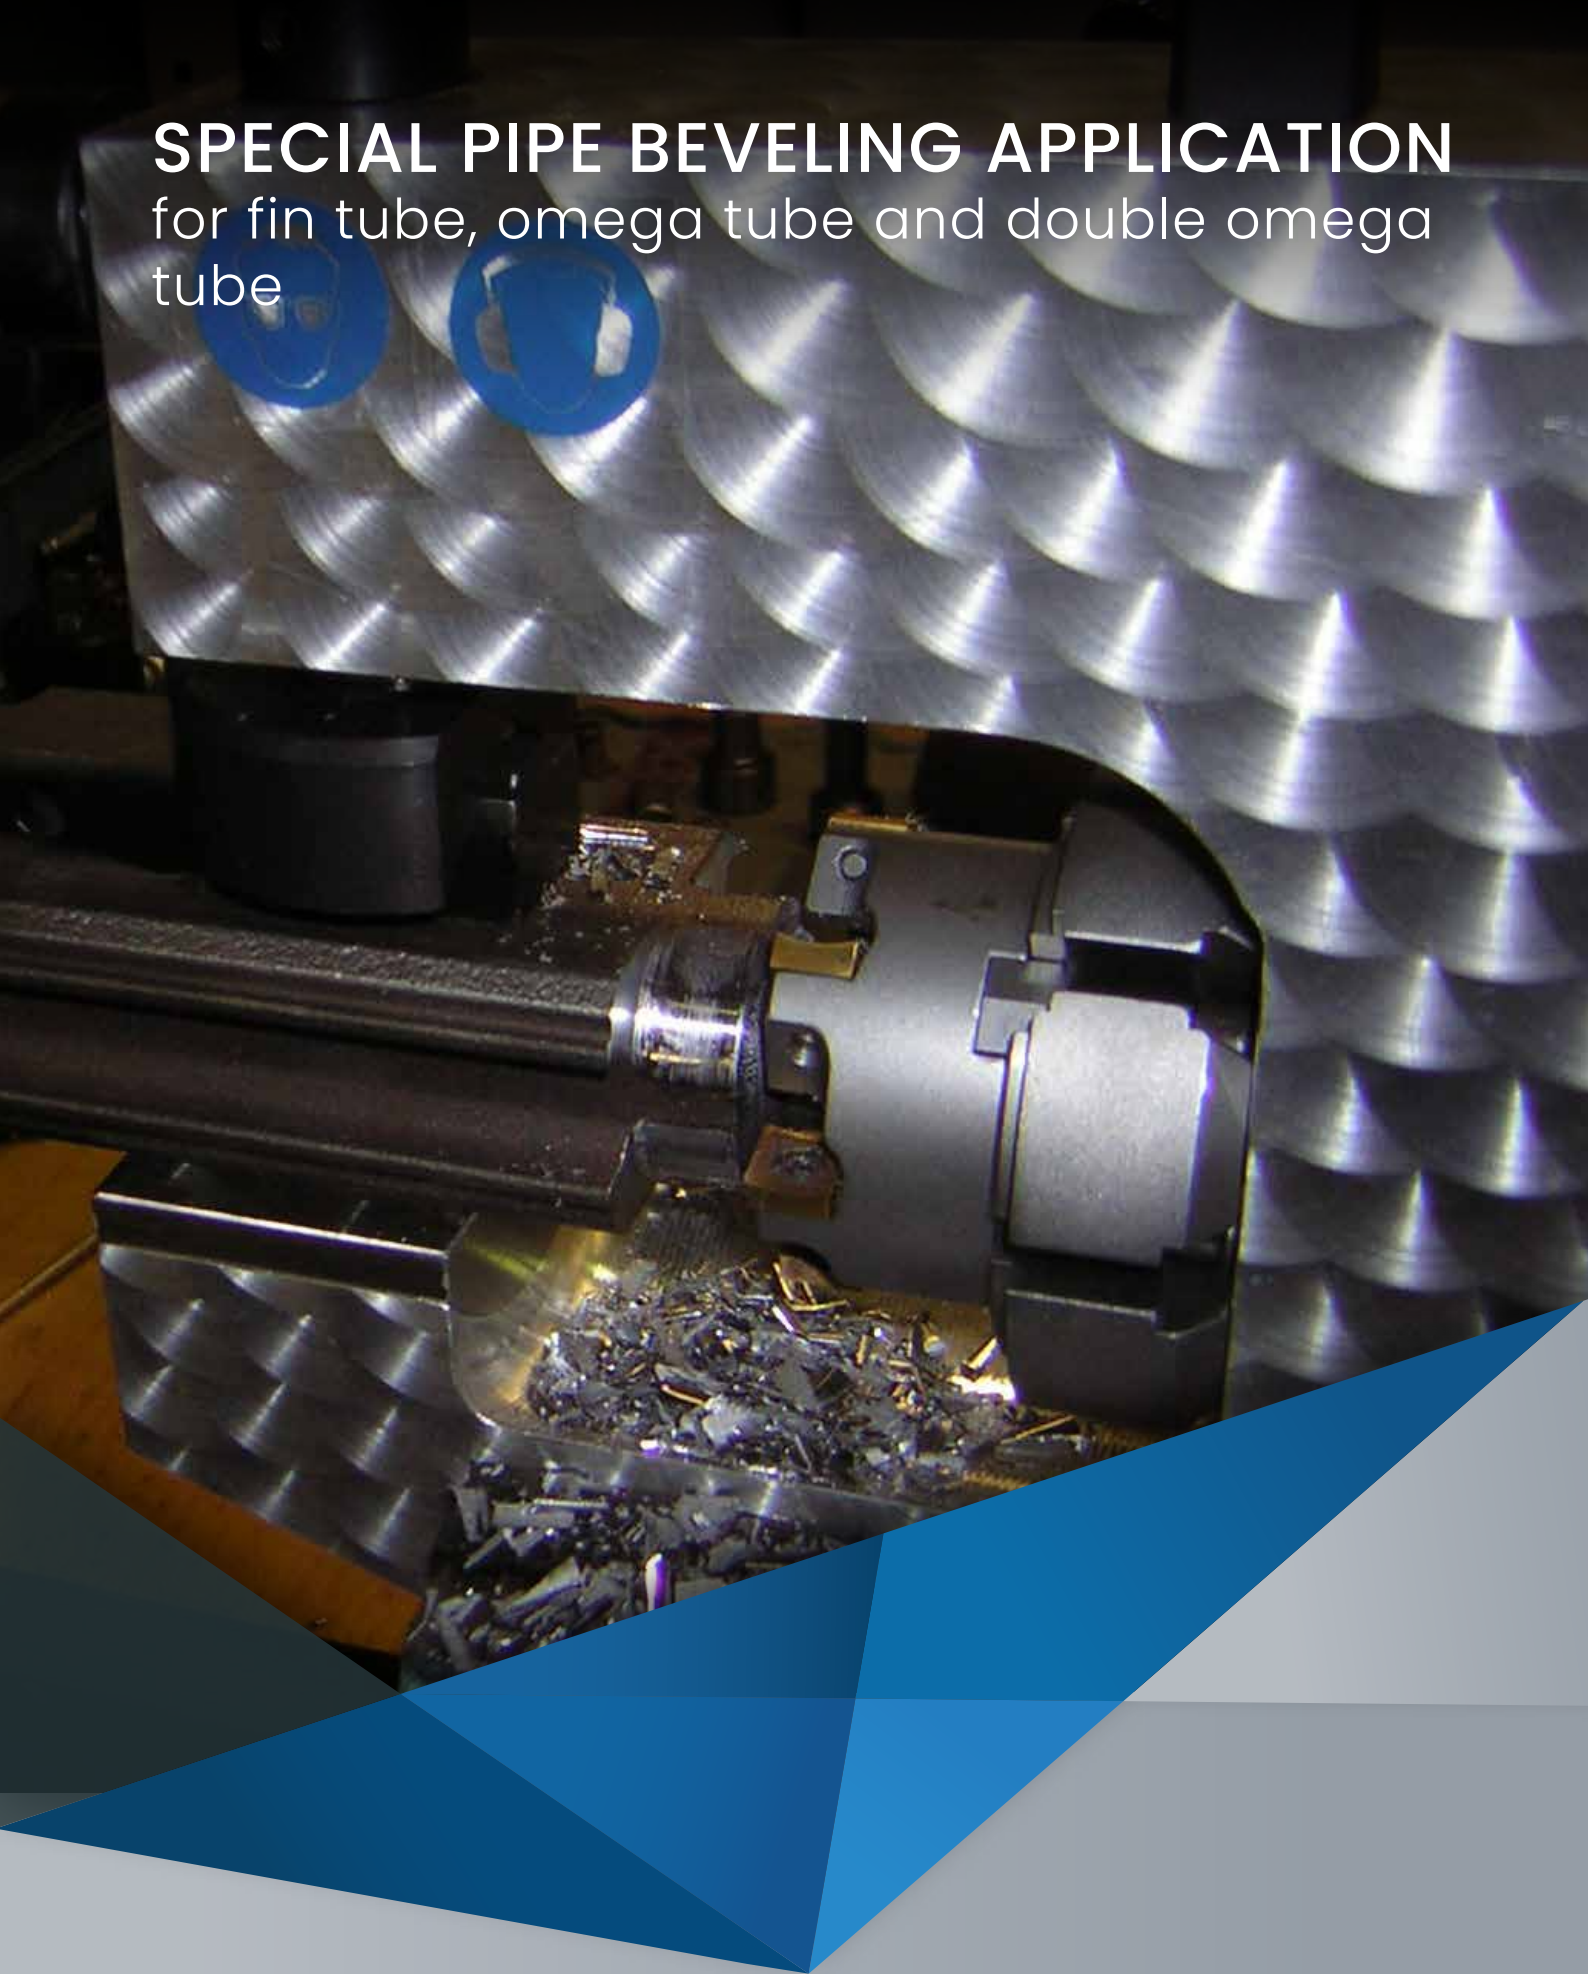

Pipe Beveler MF3-25 XL

Working Range ID-OD	12,5 - 76,1 mm (0,492 - 2,996")
Clamping Range OD-OD	20 - 76,1 mm (0,787 - 2,996")
Max. Wall thickness	15 mm (0,59")
Feed	25 mm (0,98")
Weight with electric motor	10 kg
Weight with pneumatic motor	8,8 kg



Pipe Beveling Machine MF3iw

Working Range ID-ID	25 - 96 mm (0,984 - 3,779")
Clamping Range ID-OD	25 - 114,3 mm (0,984 - 4,488")
Max. Wall thickness	15 mm (0,59")
Feed	20 mm (0,787")
Weight with electric motor	7,0 kg
Weight with pneumatic motor	5,8 kg



DWT GmbH

Wilhelm-Tenhagen-Str. 5
46240 Bottrop - Germany

T +49 (0) 2041-77144-0
F +49 (0) 2041-77144-99

info@dwt-gmbh.de

www.dwt-pipetools.com

